

# Copper Patch Panel CAT 6 - FTP

## Loaded



### Application

Category 6 Density Patch Panels provide excellent performance for high speed LANs from 10 Mb to Gigabit Ethernet 100BASETx, token ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (broadband, baseband) and digital video and analog and digital (VoIP) voice applications. 1U 19" standard format is ideal for rack installation.

### Description

High quality components and innovative IDC connection techniques with rear utilities colour coded for correct connection of FTP cable, grounded rear cable holder system. Front panel with numerical identification.

### Material specification


Operation Temperature: -20 to 68 °C

### Compliance

Wiring Printing: T568A & T568B wiring Printing on IDC. Numbered

### Standard compliance and approvals

ANSI/TIA-568-C, ISO/IEC 11801, RoHS Directive 2011/65/EU compliant

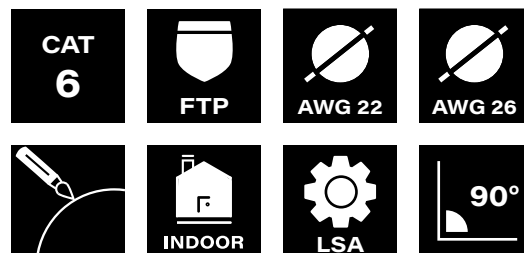

| CODE      | DESCRIPTION                                   |
|-----------|---|
| 273220-24 | ORCA – Patch Panel CAT. 6 FTP, 1U, 24P Loaded |

### RELATED PRODUCTS

#### Cable

- 212213-02
- 212213-12
- 212213-22

#### Patch cord series

- 223240-YX

#### Tool

- 269000-00