



COPPER PATCH CORD

# COPPER PATCHCORD CAT. 6A U/UTP - LSZH

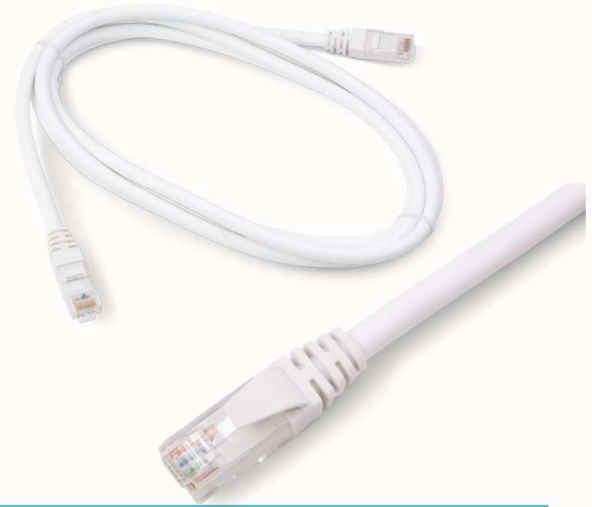


## Application

ORCA Unshielded Horizontal distribution and Backbone Cabling, IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant

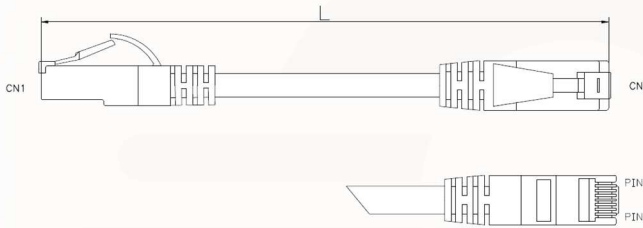

Cross-section:



### Material Specification:

Type	U/UTP CAT.6A 4*2*24AWG LSZH	
Conductor	N. of pair	4
	Material	Bare copper wire
	Construction	7/0.20 ±0.008
Insulation	Material	HDPE
	Nom.O.D.	0.945 ±0.05
Cross	Material	PE (separator)
Shielding	Material	-
Braid	Material	-
	Construction	-
Jacket	Material	LSZH
	Nom Thickness	0.6
	Nom.O.D.	6.4 ±0.20
Marking	PATCH CORD CATEGORY 6A UTP STRANDED 24AWG 4PAIRS ANSI/TIA/EIA 568B ETL LSZH	
Standard meets:	ISO/IEC 11801, EN 50173-1, ISO 11801 class Ea	

### Ordering Information code:

		Y	X	Lenght
OC-PC6--YX	ORCA - Copper Patch Cord Cat.6A UTP - White	0	1	1 m
		0	2	2 m
		0	3	3 m
		0	5	5 m
		1	0	10 m

Other measure and colour on specific request