


Copper cable CAT 5E UTP

LSZH 24AWG - Eca

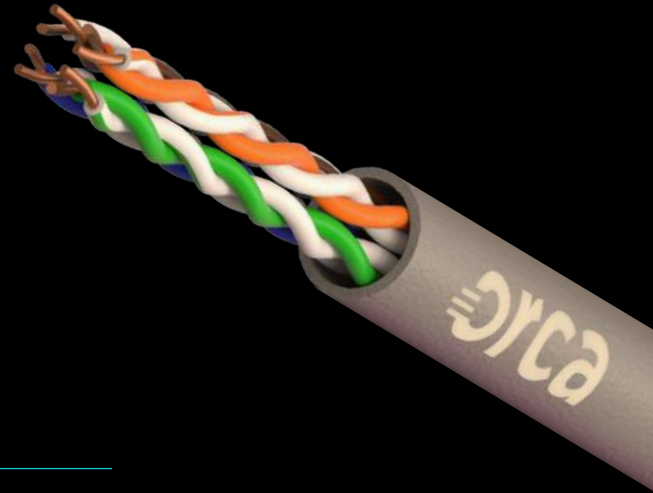

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal), IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 16 MB; ISDN; TPDDI; ATM, IEEE 802.3af-2002: POE; IEEE 802.3at: POE+

Construction and features

Material	LSZH - CPR Eca
Diameter	Nominal: 5.20 ±0.20 mm
Colour	Gray (RAL-7035)

Standard compliance and approvals

ISO/IEC 11801-1:2017(Ed. 1.0), ISO/IEC 11801-2:2017(Ed. 1.0), EN 50173-1:2018, EN 50173-2:2018, IEC 61156-5:2012 (Ed.2.1), EN 50288-3-1:2013, ANSI/TIA-568-C.2:2009, EN 60332-1-2 (Fire Performance), EN 61034-2 (Smoke Density), EN 60754-2 (Halogen Free), EN 50575 (Reaction to fire)

Electrical features and performance

Operating Temperature: -20/60°C



CODE	DESCRIPTION
212012-32	ORCA - COPPER CABLE CAT 5E U/UTP LSZH - Eca - Gray

RELATED PRODUCTS

Patch panel

- 273120-24
- 273121-48
- 570122-24
- 570123-24

Keystone

- 233120-00
- 233130-00
- 233140-00

Plug

- 232122-01

Patch cord series

- 2221X0-XX