

COPPER PATCH CORD Cat.6

COPPER PATCH CORD CAT. 6 F/UTP





Description

Shielded Horizontal distribution and Backbone Cabling, IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant

Material Specification:

Type	F/UTP CAT.6 4*2*26AWG PVC	
Conductor	N. of pair	4
	Material	Bare copper wire
	Construction	7/0.16 ±0.008
Insulation	Material	HDPE
	Nom.O.D.	0.85 ±0.05
Cross	Material	PE (separator)
Shielding	Material	Foiled Al/PET
Braid	Material	-
	Construction	-
Jacket	Material	PVC
	Nom Thickness	0.6
	Nom.O.D.	6.0 ±0.20
Marking	FTP CAT.6 - 4PR 26AWG ISO/IEC 11801 TIA/EIA-568B (ETL)	
Standard meets:	ISO/IEC 11801, EN 50173-1, ISO 11801 class E	

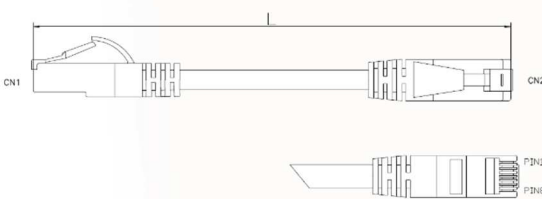

Ordering Information code:

OC-PC6-223240-YX	ORCA - Copper Patch Cord Cat.6 F/UTP - Grey	Y	X	Length
		A	0	0,5 m
		O	1	1 m
		A	1	1,5 m
		O	2	2 m
		O	3	3 m
		O	5	5 m
		1	0	10 m
		1	5	15 m