


# Copper patch cord CAT 5E UTP

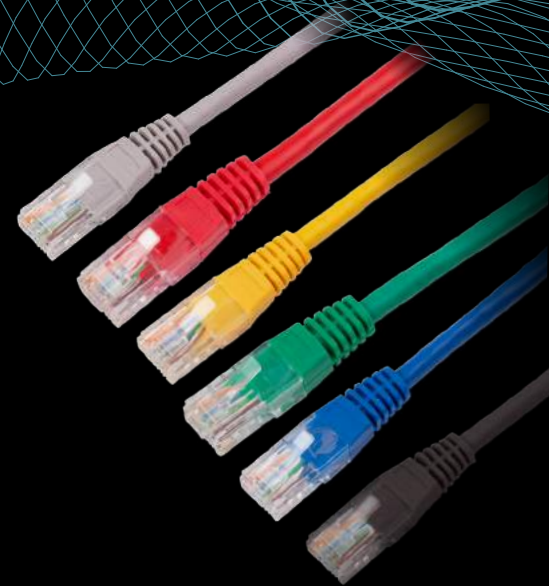

## Application

Horizontal distribution and Backbone Cabling, IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant

## Material Specification

Jacket PVC  
Braid Nom.O.D. 5.4 ±0.20 mm



## Electrical Features and Performance

Operating Temperature: -10/+60°C



LENGTH (m)	GREY ●	RED ●	YELLOW ●	GREEN ●	BLUE ●	BLACK ○
0,5	222140-A0	222170-A0	222180-A0	222190-A0	222160-A0	222110-A0
1	222140-01	222170-01	222180-01	222190-01	222160-01	222110-01
1,5	222140-A1	222170-A1	222180-A1	222190-A1	222160-A1	222110-A1
2	222140-02	222170-02	222180-02	222190-02	222160-02	222110-02
3	222140-03	222170-03	222180-03	222190-03	222160-03	222110-03
5	222140-05	222170-05	222180-05	222190-05	222160-05	222110-05
10	222140-10	222170-10	222180-10	222190-10	222160-10	222110-10
15	222140-15	222170-15	222180-15	222190-15	222160-15	222110-15