

Copper Patch Panel CAT 5E - UTP

Loaded



Application

Category 5 Density Patch Panels provide excellent performance for high speed LANs from 10 Mb to Gigabit Ethernet applications. 1U 19" standard format is suitable for rack installation.

Description

High quality components and innovative IDC connection techniques with rear utilities colour coded for correct connection of UTP cable, and planar ring cable clips. Front of the panel features easy to use slide in labels.

Material specification


Operation Temperature: -20 to 68 °C

Compliance

Wiring Printing: T568A & T568B wiring Printing on IDC
Numbered and with label holder

Standard compliance and approvals

ANSI/TIA-568-C, ISO/IEC 11801, RoHS Directive 2011/65/EU compliant

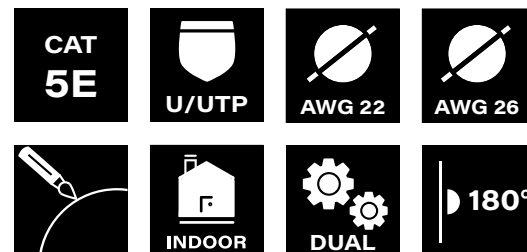

CODE	DESCRIPTION
272120-24	ORCA – Patch Panel CAT. 5E UTP, 1U, 24P Loaded
272120-48	ORCA – Patch Panel CAT. 5E UTP, 2U, 48P Loaded

RELATED PRODUCTS

Cable

- 21012-32
- 21012-32

Patch cord series

- 2221Z0-YX
- 2221Z0-YX

Tool

- 269000-00