

COPPER PATCH PANEL



COPPER PATCH PANEL CAT. 6A - FTP



Description

ORCA High quality components and innovative IDC connection techniques with rear utilities colour coded for correct connection of FTP cable, grounded rear cable holder system. Front panel with numerical and icona tab identification.

Material Specification e Feature:


Main body	Material	Metal SPCC
	Dimension	1U
	Color	Black
PIN	Material	Phosphor Bronze
	Life	≥750 times
	TYPE	PC - LSA Krone / toolless compatible
IDC	Life	200 times of repeated threading
	AWG range:	22-26
	Number	24 - PBT Plastic Housing - numbered and with label space
Port	Type	RJ45 - Cat. 6A
	Shield	FTP
	Operation Temperature	-20 to 68 °C

Reference Standard:

ANSI/TIA-568-C

ISO/IEC 11801

RoHS Directive 2011/65/EU compliant

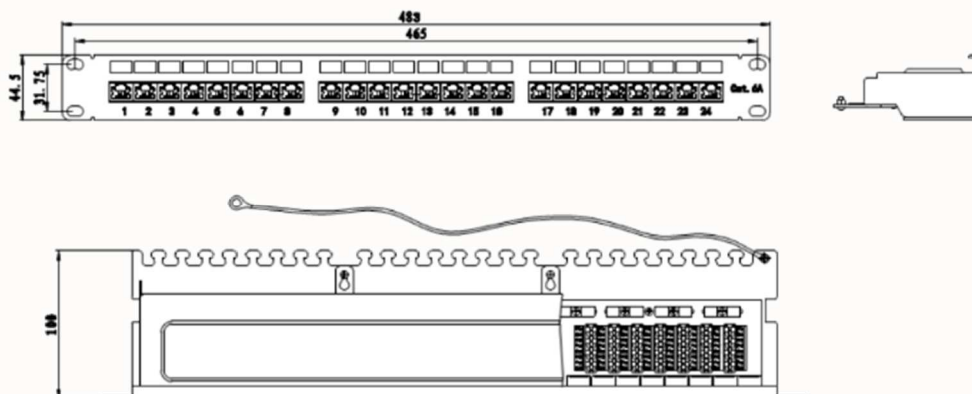

Ordering Information code:

OC-PP6-273124-24

ORCA - PATCH PANEL CAT. 6A FTP, 1U, 24P LOADED

Specifications subject to change without prior notice - For more details please visit www.orca.it