

COPPER PATCH CORD Cat.6

SLIM COPPER PATCH CORD CAT. 6 U/UTP





Description

Unshielded horizontal distribution and Backbone Cabling, IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant

Material Specification:

Type	U/UTP CAT.6 4*2*28AWG PVC	
Conductor	N. of pair	4
	Material	Bare copper wire
Insulation	Construction	7/0.127±0.008
	Material	HDPE
Cross	Nom.O.D.	0.61 ±0.05
	Material	-
Shielding	Material	-
	Material	-
Braid	Construction	-
	Material	PVC
Jacket	Nom Thickness	0.38
	Nom.O.D.	3.8 ±0.20
Marking	UTP CAT.6 - 4PR 28AWG ISO/IEC 11801 TIA/EIA-568B (ETL)	

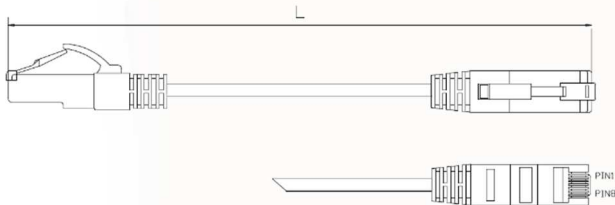

Ordering Information code:

OC-PC6-223142-YX	ORCA - SLIM Copper Patch Cord Cat.6 UTP - Grey	Y	X	Lenght
		0	1	1 m
		0	2	2 m
		0	3	3 m
		0	5	5 m
		1	0	10 m

Specifications subject to change without prior notice - For more details please visit www.orca.it