


COPPER PATCH CORD




# COPPER PATCH CORD CAT. 6A S/FTP - LSZH

## Application

Shielded Horizontal distribution and Backbone Cabling, IEEE 802.3an; 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant.

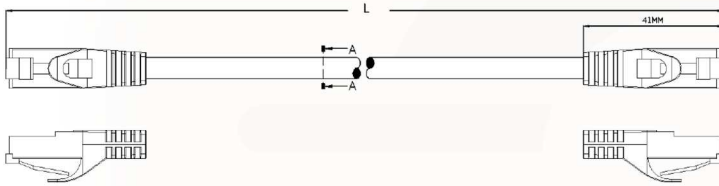

Cross-section :

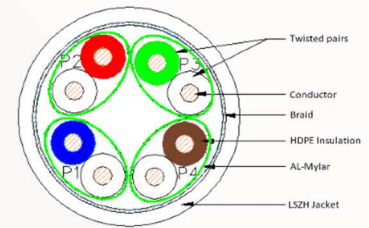

### Material Specification:

Type	S/FTP CAT.6A 4*2*26AWG LSZH	
Conductor	N. of pair	4
	Material	Bare copper wire
	Construction	7/0.16 ±0.008
Insulation	Material	HDPE
	Nom.O.D.	1.04 ±0.05
Cross	Material	-
Shielding	Material	Al
Drain wire	Nom.O.D.	-
Braid	Material	ALM
	Construction	5*16/0.12
Jacket	Material	LSZH
	Nom Thickness	0.6
	Nom.O.D.	6.0 ±0.20
Marking	PATCH CORD UTP CAT.6A SSTP STRANDED 26AWG 4PAIRS ANSI/TIA/EIA 568B ETL LSZH	
Standard meets:	ISO/IEC 11801, EN 50173-1, ISO 11801 class Ea	

### Ordering Information code:

		Y	X	Lenght
OC-PC6-224230-YX	ORCA - Copper Patch Cord Cat.6A S/FTP LSZH - White	0	1	1 m
		0	2	2 m
		0	3	3 m
		0	5	5 m
		1	0	10 m

Specifications subject to change without prior notice - For more details please visit www.orca.it